


Falls® Skid Steer Loader-Mounted SSTR Reversible Snow Plow

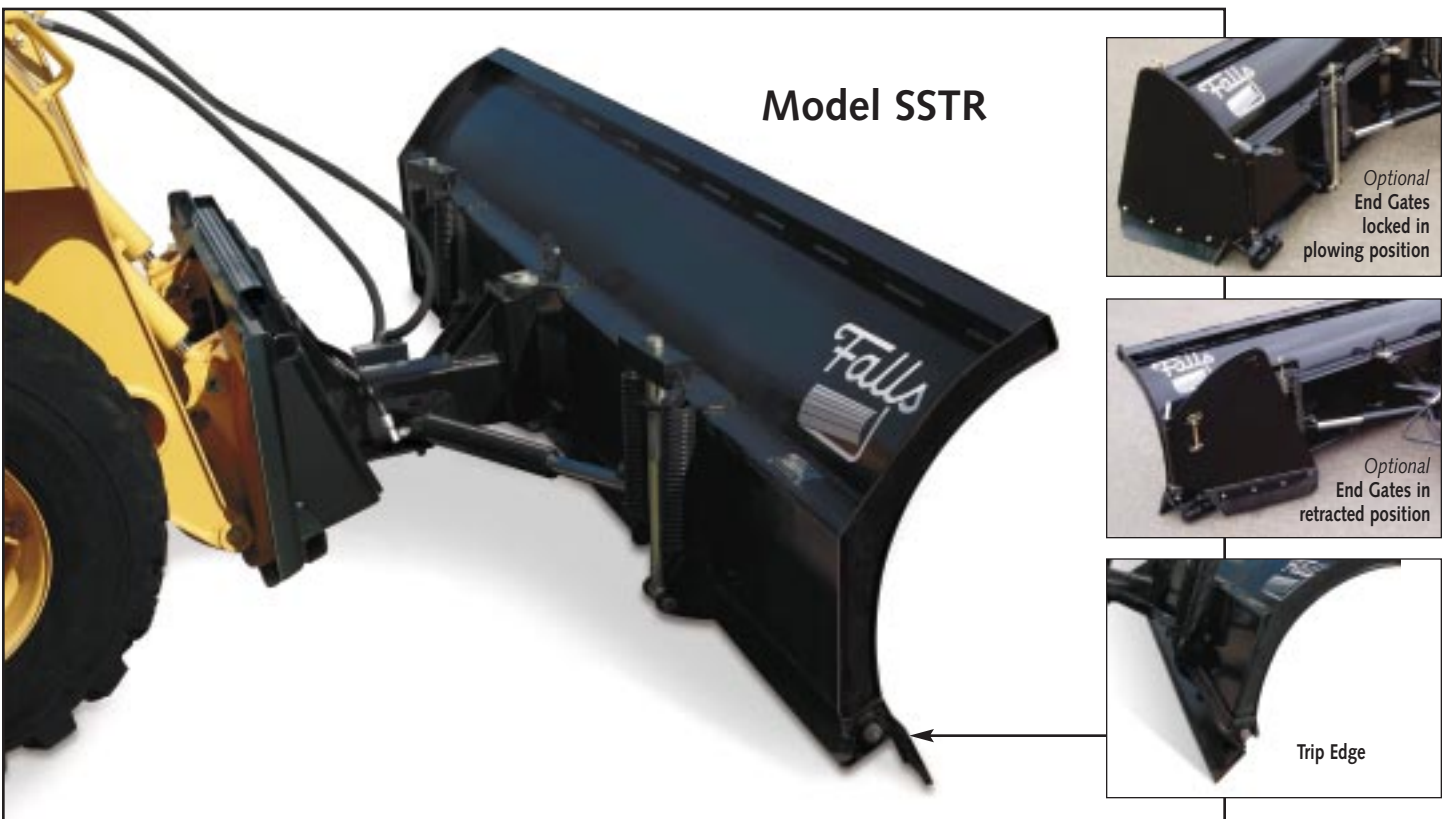

The Falls® model SSTR Skid Steer Reversible Snow Plow is built with the same pedigree as the award winning highway-style Falls V-Plows, High-Speed Plows and Snow Wings. You can be sure that the same quality and pride goes into these gritty snow fighters!

- **Heavy-Duty Construction**
 - 31" moldboard height, 10 gauge Grade 50 steel
 - 7 gauge Grade 50 steel box-formed reinforcement
 - Superior push frame and reversing circle
 - 8 foot (750 lbs) and 9 foot (800 lbs.) models
- **Industrial-Style Single-Acting Reversing Cylinders**
 - Full 30 degree angle left and right
 - 1.5" rod, 2" diameter, 11.75" stroke.
- Mechanical stops to prevent over-rotation
- **Adjustable Safety Trip Cutting Edge to minimize impact on plow and loader when encountering hidden obstacles.**
 - Standard replaceable 5/8" x 6" cutting edge
 - Adjustable Safety Trip Cutting Edge
- **Universal Quick Coupler Mounting Plate mounted with precise forward pitch**
- Utilizes existing skid steer loader auxiliary hydraulic controls
- Options include END GATES, wear shoes, high-visibility blade guide-ons, rubber snow deflector
- Full 2-year warranty

Specifications

SSTR Reversible Snow Plow

The following specifications are designed to help you acquire a Falls® SSTR Reversible Snow Plow — Skid Steer Loader Mounted or its equal. The dimension within the specifications are intended to indicate the size, type, and quality of unit desired.

Moldboard: Shall be minimum 31" height, 10 gauge Grade 50 steel. Shall have 7 gauge Grade 50 steel box-formed reinforcement. Shall have superior push frame and reversing circle. Available in 8-foot or 9-foot models.

Cylinders: Shall be industrial-style, single-acting reversing cylinders. Shall have a full 30 degree angle left and right. Shall have 1.5" rod, 2" diameter, with 11.75" stroke. Shall have mechanical stops to prevent over-rotation.

Trip Edge: Shall be adjustable safety trip cutting edge. Shall be standard replaceable 5/8" x 6" cutting edge.

Mounting: Shall include universal quick coupler mounting plate mounted with precise forward pitch.


Hydraulics: Shall utilize existing skid steer loader auxiliary hydraulic controls.

Options:

1. Retractable end gates.
2. Wear shoes.
3. High-visibility blade guide-ons.
4. Rubber snow deflector.
5. Hydraulic quick couplers.

Paint: Available in Falls Black.

Warranty: 2 year limited warranty.



YOUR DEALER IS:

The policy and promise of Little Falls Machine, Inc. is continuing product improvement. Design change and structural alterations may occur without prior notice. Such changes will not sacrifice quality or product integrity.

Falls® is the registered trademark of Little Falls Machine, Inc.



LITTLE FALLS MACHINE, INC.

300 Lindbergh Drive South
Little Falls, MN 56345
Phone 800-772-PLOW
(320) 632-9266
Fax (320) 632-3484
www.fallsplows.com